




PONTOON VARADERO SY

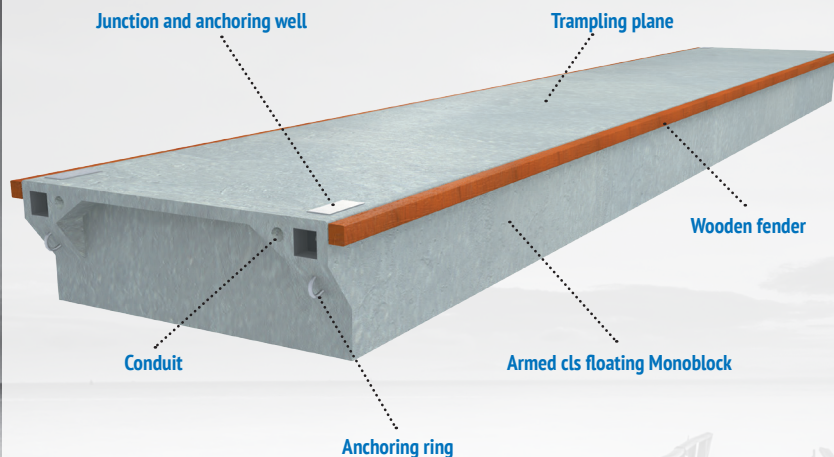

STRUCTURE

Concrete monoblock 45-65 kg/mm² with galvanized or stainless-steel reinforcement, with added synthetic fibers and lightened by a polystyrene core expanded with a closed cell.

ANCHORING SYSTEM

Pontoons can be anchored via anchor poles or flexible anchorage. Four anchor points are designed at the ends of the jetty with direct access from the surface.

SERVICE CHANNELS

The pontoon is equipped with two 250x120 mm side compartments covered with anodized aluminum alloy covers.

JOINT SYSTEM

The union between the various modules takes place through a Mega Joint system, composed of special steel tie rods with very high strength and neoprene Semi rigid shock absorbers

SURFACE FINISH

In cls non-slip, resin and grit, in exotic wood slats.

The **CWSY** line is the immediate response to meet the demands and needs regarding the mooring of super yachts. The **CWSY** line adapts to any modern and innovative marina project where very high values of scope, displacement and free board are required.

SPECIFICATIONS

	CW01SY	CW02SY	CW03SY	CW04SY
Length (m)	20,00	16,00	20,00	16,00
Width (m)	3,50	3,50	4,00	4,00
Height (m)	1,20	1,20	1,20	1,20
Overload (kg/m ²)	650	650	650	650
Displacement (ton)	35,00	28,00	48,00	38,00
Free border (cm)	65,00	65,00	65,00	65,00

